


Flange Gaskets

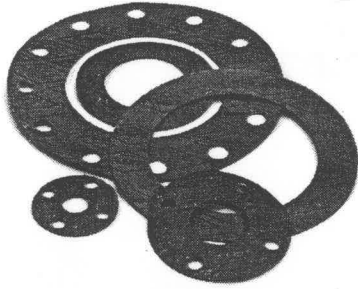

STYLE 0710 Red Rubber Cloth Finish

Styrene Butadiene Rubber Sheet. Excellent low cost flange gasket material. Non-oil resistant compound for air, hot and cold water, and exterior service. Durometer - 75 ±10/-5. Tensile strength - 400 PSI. Temperature range: -20°F to 180°F continuous/210°F intermittent. Red color.

STYLE 0725 Neoprene 60 Durometer

Neoprene blend provides moderate resistance to oil and ozone. For use in bumpers, pads, and sealing in general gasket and flange applications. Minimum tensile strength - 800 PSI. Durometer 60±5. Temperature range: -20°F to +170°F. Black color.

STYLE 0KC4401 KLINGER®sil C-4401

Synthetic fiber; nitrile binder; excellent sealability; excellent chemical resistance; good creep relaxation; good general purpose sheet. Tensile strength 2200 PSI typical (ASTM F152 Cross Grain).

Ring Gaskets 150 lb. Flanges			Full Face Gaskets 150 lb. Flanges		
Nom. Pipe Size	ASA Standard B 16.21		Nom. Pipe Size	ASA Standard B 16.21	
	I.D.	O.D.		I.D.	O.D.
1/2	27/32	1 7/8	1/2	27/32	3 1/2
3/4	1 1/16	2 1/4	3/4	1 1/16	3 7/8
1	1 5/16	2 5/8	1	1 5/16	4 1/4
1 1/4	1 21/32	3	1 1/4	1 21/32	4 5/8
1 1/2	1 29/32	3 3/8	1 1/2	1 29/32	5
2	2 3/8	4 1/8	2	2 3/8	6
2 1/2	2 7/8	4 7/8	2 1/2	2 7/8	7
3	3 1/2	5 3/8	3	3 1/2	7 1/2
3 1/2	4	6 3/8	3 1/2	4	8 1/2
4	4 1/2	6 7/8	4	4 1/2	9
4 1/2	5	7	4 1/2	5	9 1/4
5	5 9/16	7 3/4	5	5 9/16	10
6	6 5/8	8 3/4	6	6 5/8	11
7	7 5/8	10	7	7 5/8	12 1/2
8	8 5/8	11	8	8 5/8	13 1/2
9	9 5/8	12 1/2	9	9 5/8	15
10	10 3/4	13 3/8	10	10 3/4	16
12	12 3/4	16 1/8	12	12 3/4	19
14	14	17 3/4	14	14	21
16	16	20 1/4	16	16	23 1/2
18	18	21 5/8	18	18	25
20	20	23 7/8	20	20	27 1/2
22	22	26	22	22	29 1/2
24	24	28 1/4	24	24	32
26	26	30 1/2	26	26	34 1/4
28	28	32 3/4	28	28	36 1/2
30	30	34 3/4	30	30	38 3/4
32	32	37	32	32	41 3/4
34	34	39	34	34	43 3/4
36	36	41 1/4	36	36	46

Flanged Fittings and Flanges

